


Three Way LV Cable Breakout



EB3

Heat Shrinkable 3-way Cable Breakout provides an environmental seal to the crutch of 3 core plastic and paper insulated cables, rated up to 1.1kV. The Breakout is made from thermally stabilised, cross linked, polymeric material.

The Breakout are internally coated with hot melt adhesive.

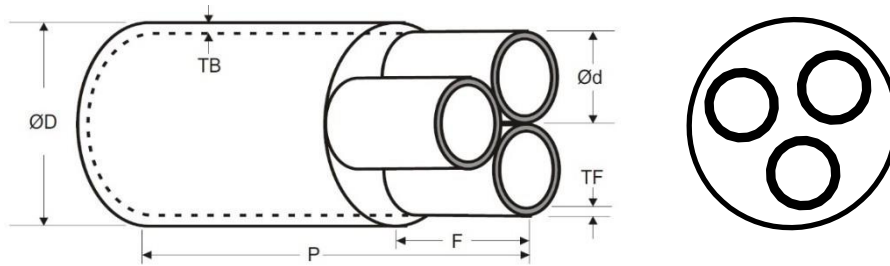

*Drawing depicts typical dimensions

D, d – Internal Diameter without Adhesive Coating | E – As Supplied | S – After Free Recovery | T – Thickness

PRODUCT DIMENSIONS – EB3 Series (all dimensions are in mm)

CODE & SIZE	D		d		P		F		TB	TF
	E	S	E	S	E	S	E	S	S	S
	Min	Max	Min	Max					Nom.	Nom.
EB3-28-09	28	9	9	3	53	72	15	17	2.5	1.8
EB3-35-15	35	15	13	4	88	102	20	23	2.5	1.8
EB3-55-23	55	23	25	8	133	177	35	37	3.3	2.5
EB3-75-28	75	28	35	13	173	215	43	47	3.5	3.0
EB3-115-30	115	30	53	13	160	210	40	55	3.8	3.0
EB3-110-35	110	35	50	17	183	220	50	55	4.0	3.5
EB3-140-46	140	45	70	21	180	220	50	55	3.8	2.5
EB3-125-59	120	56	50	17	183	220	50	55	4.0	3.5
EB3-170-56	170	56	81	27	200	260	55	63	3.8	2.8

MATERIAL SPECIFICATIONS

CHARACTERISTIC	VALUE	TEST METHOD
Physical Properties		
Water Absorption	0.2%	ASTM D – 570/ISO 62
Tensile Strength	≥21 MPa	EN 60684 – 2
Ultimate Elongation	400% (min)	ASTM D – 412 / ISO 37
Longitudinal Change	10% (max)	-
Longitudinal Shrinkage	≥ 3:1	-
Hardness	45 ± 3 Shore D	ASTM D – 2240 / ISO 868
Density	1.05 ± 0.2 g/cm ³	ASTM D – 1505 / D=M/V
Bending at -30°C	No Cracks	EN 60684 – 2
Thermal Ageing Tests (150°C for 168 hours)		
Ultimate Elongation	300% (min)	ASTM D – 2 / EN 60684 – 2
Tensile Strength	≥18 MPa	ASTM D – 2 / EN 60684 – 2
Electrical Properties		
Dielectric Constant	5 (max)	ASTM D – 150 / IEC 250
Dielectric Strength	≥12kV/mm (min)	ASTM D – 149 / IEC 243
Volume Resistivity	1x10 ¹³ Ohm-cm (min)	ASTM D – 257 / IEC 93
Chemical Properties		
Fungus Resistance	Rate 1	ASTM D - 2671
Corrosion	None	ISO 846 Method A

REPL reserve the right to update the information contained in this document at any time without notice. It is the users responsibility to ensure it is suitable for the intended application. Any implied warranty relating to fitness for a particular purpose are explicitly excluded unless agreed in writing by REPL.

©REPL 2017



DATA SHEET

EB3 22/01